



STCO 2000

Rotating High Impact Jet Spray - Low Flow

The STCO 2000 series rotating tank cleaners are designed for small to medium sized tanks. This nozzle rotates with high cleaning performance.

- High cleaning performance
- Robust, low-maintenance stainless steel construction
- Concentrated jets for greater impact force




Performance Data

Material	316LSS
Spray Coverage	360°
Recommended Pressure	2-20 bar
Max. Cleaning Diameter	8 -11 metres
Inlet Connection	3/4" BSPF (NPT thread on request)
Max. Operating Temperature	90°C

THREAD INLET CONN.	NOZZLE CODE	NOZZLE SIZING (mm)	FLOW RATE (LPM @ BarG)						CLEANING DIA. @ 2.0 BarG (m)	APPROX. HEIGHT (Y) (mm)	APPROX. WIDTH (X) (mm)
			2	5	7	10	15	20			
1-1/2	STCO2006	6	59	83	118	132	167	187	8	265	121
	STCO2007	7	63	89	126	140	178	199	9	265	121
	STCO2008	8	69	98	138	154	195	218	10	265	121
	STCO2010	10	79	111	158	177	223	250	11	265	121
1-1/2	STCO2006-4	6	84	133	157	189	231	266	8	265	121
	STCO2007-4	7	105	166	196	234	287	332	9	265	121
	STCO2008-4	8	147	231	274	329	402	465	10	265	121
	STCO2010-4	10	178	283	336	402	491	568	11	265	121

STCO 2000 SERIES - 2 Nozzle

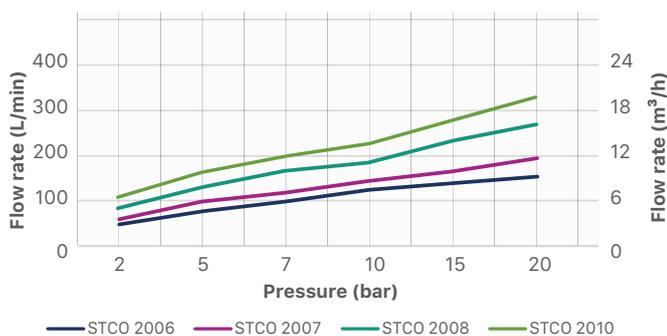

STCO 2000 SERIES - 4 Nozzle

