



STCO 500

Rotating Jet Spray - Low-Medium Flow

The STCO 500 series rotating tank cleaners are designed for small to medium sized tanks. This nozzle rotates with high cleaning performance.

- High cleaning performance
- Robust, low-maintenance stainless steel construction
- Concentrated jets for greater impact force




Performance Data

Material	316LSS
Spray Coverage	360°
Recommended Pressure	4-20 bar
Max. Cleaning Diameter	5 metres
Inlet Connection	3/4" BSPF (NPT thread on request)
Max. Operating Temperature	90°C

THREAD INLET CONNECTION	NOZZLE CODE	NOZZLE SIZING (mm)	FLOW RATE (LPM @ BarG)						CLEANING DIA. @2.0 BarG (m)	APPROX. HEIGHT (Y) (mm)	APPROX. WIDTH (X) (mm)
			2	5	7	10	15	20			
3/4	STCO 504	4	25	30	36	45	55	63	4.9	213	96
	STCO 505	5	35	44	55	66	80	95	5.2	213	96
	STCO 506	6	42	53	64	76	92	110	5.4	213	96
3/4	STCO 504-4	4	40	48	57	72	88	100	4.9	213	96
	STCO 505-4	5	56	70	88	105	128	152	5.2	213	96
	STCO 506-4	6	67	84	102	121	147	176	5.4	213	96

STCO 500 SERIES - 2 Nozzle

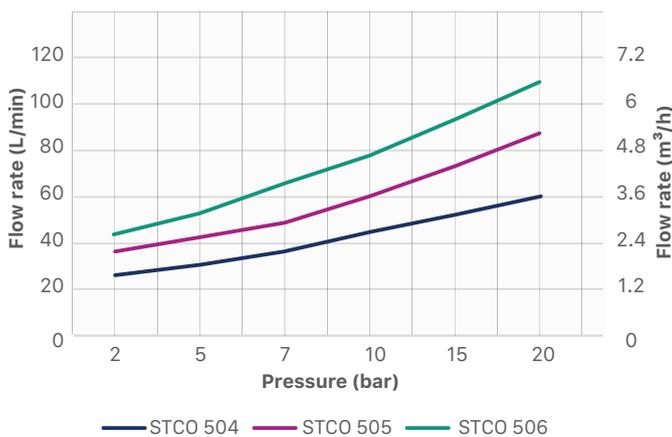

STCO 500 SERIES - 4 Nozzle

